




Feedthrough EMI Filter Datasheet

(M5 Thread : 4.75mm Hexagonal Head)

Circuit Configuration



Dimensions mm (inches)

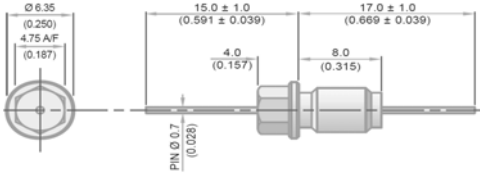

M5 x 0.8 – 6g Thread

Electrical Details	
Electrical Configuration	T Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	450nH
Mechanical Details	
Body Flange Diameter	6.35mm (0.250")
Head A/F	4.75mm (0.187")
Nut A/F	6mm (0.236")
Washer Diameter	9.1mm (0.358")
Mounting Torque (Maximum)	0.6Nm (5.31lbf in) if using nut 0.3Nm (2.65lbf in) into tapped hole
Mounting Hole Diameter	5.2mm ± 0.1 (0.205" ± 0.004")
Max. Panel Thickness	4.9mm (0.193")
Weight (Typical)	1.5g (0.05oz)
Finish	Silver plate on copper undercoat

Product Code	Hardware	Capacitance ±20% UOS	Dielectric	Rated Voltage (dc)	DWV (dc)	Typical Insertion Loss (db)						
						0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz	
*SFBMT5000100ZC	0 = No hardware supplied 1 = supplied with standard nut and wavy washer Other options available – please contact factory	10pF -20% / +80%	COG	500	750						9	
SFBMT5000150ZC		15pF -20% / +80%	COG	500	750						11	
SFBMT5000220ZC		22pF -20% / +80%	COG	500	750					1	14	
SFBMT5000330ZC		33pF -20% / +80%	COG	500	750					2	18	
*SFBMT5000470ZC		47pF -20% / +80%	COG	500	750					4	20	
*SFBMT5000680MC		68pF	COG	500	750					6	23	
*SFBMT5000101MC		100pF	COG	500	750					9	27	
SFBMT5000151MC		150pF	COG	500	750					12	30	
*SFBMT5000221MC		220pF	COG	500	750					15	33	
*SFBMT5000331MC		330pF	COG	500	750				1	19	36	
*SFBMT5000471MC		470pF	†X7R	500	750				2	21	40	
SFBMT5000681MC		680pF	†X7R	500	750				4	24	43	
*SFBMT5000102MX		1.0nF	X7R	500	750				7	28	47	
SFBMT5000152MX		1.5nF	X7R	500	750				10	30	50	
*SFBMT5000222MX		2.2nF	X7R	500	750				13	34	53	
SFBMT5000332MX		3.3nF	X7R	500	750				17	38	57	
*SFBMT5000472MX		4.7nF	X7R	500	750				19	40	59	
SFBMT5000682MX		6.8nF	X7R	500	750			1	23	43	63	
*SFBMT5000103MX		10nF	X7R	500	750				4	26	45	66
*SFBMT5000153MX		15nF	X7R	500	750				7	29	47	68
*SFBMT5000223MX		22nF	X7R	500	750				10	33	49	70
SFBMT5000333MX		33nF	X7R	500	750				14	36	50	>70
*SFBMT2000473MX		47nF	X7R	200	500			1	17	39	52	>70
SFBMT2000683MX		68nF	X7R	200	500			2	20	42	57	>70
SFBMT1000104MX		100nF	X7R	100	250			4	22	46	62	>70
SFBMT0500154MX		150nF	X7R	50	125			7	25	49	68	>70

* Recommended values

† Also available in COG

Ordering Information

Type	Case Style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Capacitance Tolerance	Dielectric	Nuts & washers
Syfer Filter	B 4.75mm Hex Head	M	T T = T Filter	500 050 = 50V 100 = 100V 200 = 200V 500 = 500V	0102 First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. Examples: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	X C = COG/NPO X = X7R	O = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of pin length / custom body dimensions or threads / alternative voltage rating / non-standard intermediate capacitance values / test requirements.

Please refer specific requests to the factory.

